

# MAG6588 Intelligent Network Paging Station



## *Features*

- 1,000 zones which can be activated
- 7-inch true color LCD display
- 1 aux input, 1 aux output and 1 headphone
- Support TCP/IP
- Users can view zone information.
- Log management and screen calibration
- The backlight on time can be adjusted to save energy.
- Shared WAN/LAN network


## *Description*

MAG6588 is intelligent network [paging station](#) allow up to 1,000 zones which can be activated by simply one button. It can realize zone based calling and group based calling. Supports TCP/IP and is compatible to shared WAN/LAN network. The system can provide 1 AUX input, 1 AUX output and 1 headphone monitoring interface to realize local extension. It provides log management and screen calibration functions. Users can view zone information. It can realize zone based calling and group based calling.

## *Specification*

Rated Output Voltage	1.0±0.2V
MIC input sensitivity (1V output)	50±10mV
MIC distortion (1Kz/1V)	MIC: ≤0.2%
Effective frequency of MIC gain limit (±3dB)	40-20000Hz
MIC Signal to Noise Ratio (30K lowpass)	≥75dB
AUX input sensitivity (1V output)	300±50mV
AUX distortion (1Kz/1V)	AUX≤0.1%
AUX Signal to Noise Ratio (30K lowpass)	≥80dB
Effective frequency of AUX gain limit (±3dB)	20-20000Hz
Effective frequency of monitoring (talkback voice) gain limit (±3dB)	40-13000 Hz
Working voltage	AC180-240V
Standby power consumption	14.5W
Package dimensions (mm)	(L×W×H) 415×285×160
Net Weight	2kg

## Rear Panel

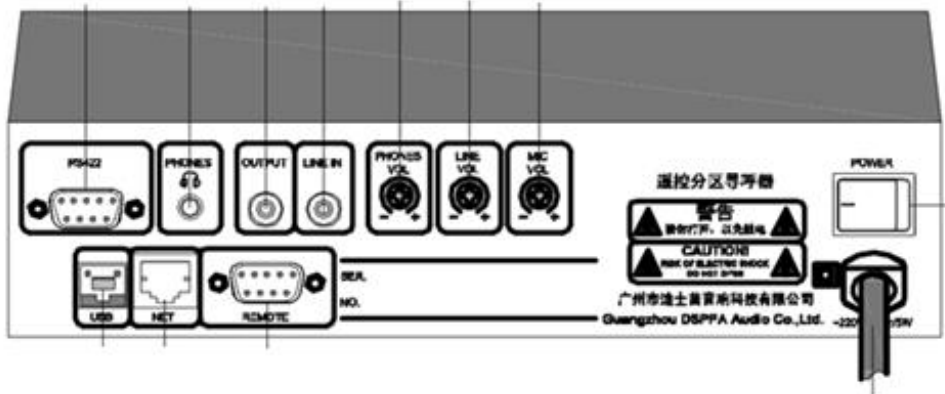

## Connection

